


- A: Top support rope Ø20 mm
- C: Lateral anchor rope Ø16 mm
- D: Upslope anchor rope Ø16 mm

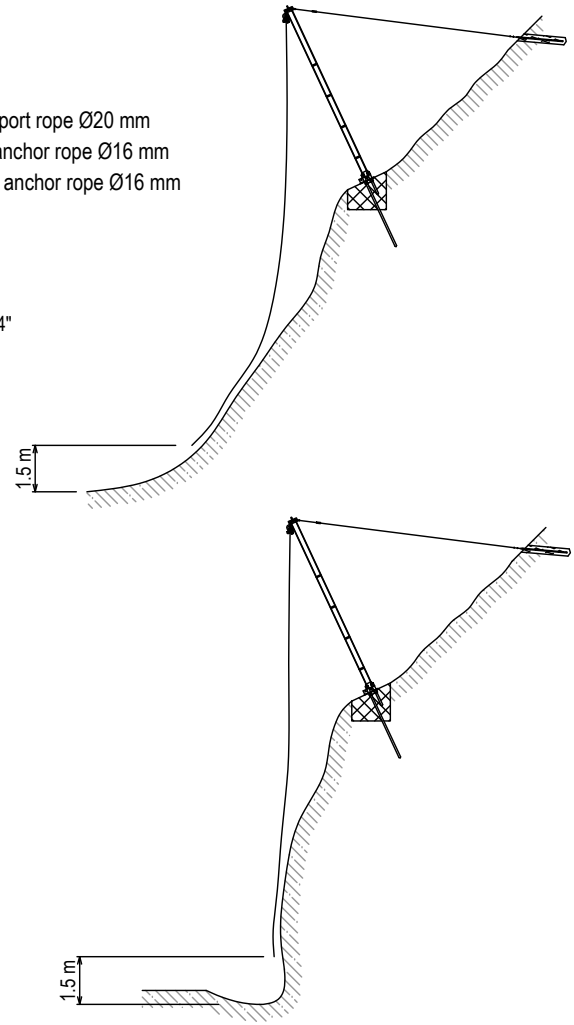

| | | | | | |
|---|------|-----------------|------------------|----------|-----|
| modification: | M: % | substitute for: | | | |
| - | | replaced by: | | | |
| Attenuator ATT-60 Rope assembly | | | drawn | 19.12.18 | BIH |
| | | | checked | 19.12.18 | LAA |
| | | | approved | 19.12.18 | LAA |
| GEOBRUGG AG CH-8590 Romanshorn | | | GS-1568 e | | |

This document is proprietary to GEOBRUGG AG and is copyrighted with all rights reserved. It may not in whole or in part, be distributed, copied in any form, translated or otherwise reproduced in any form.

This document will not be exchanged, when being modified.